

CROSSBOND®



The Perfect Floor For Any Occasion
Easy to love. Harder to damage.

Vienna Collection

PREMIUM EUROPEAN DESIGNS



Powered
by  Välinge

MAKE A GRAND APPEARANCE with CROSSBOND HDF LAMINATE FLOORING.

From Modern Patterns to true-to-Nature woodgrain structures, CROSSBOND HDF LAMINATE FLOORING is designed to bring your living space to *life* and improve *comfort*.



Technical Specification

PRODUCT FEATURE	TEST STANDARD	AC-3	AC-4
Abrasion Resistance	EN13329	AC-3	AC-4
Impact Resistance	EN13329	IC1	IC1
Stain Resistance	EN438	Group 5	Group 5
Cigarette Burns	EN438	Class 5	Class 5
Light Fastness	EN20105/A02	Class 7	Class 7
Furniture Legs	EN426	No Damage	No Damage
Chair Caster (Soft Roll)	EN425	No Damage	No Damage
Thickness Swelling	EN13329	≤18%	≤18%
Static Indentation	EN433	0.9 N/MM ²	0.9 N/MM ²
Flame Resistance	EN13501	CFL-S1	CFL-S1
Floor Design Dimensions		1220mm X 194mm X 8mm	

Features



Easy to Install- Fast and Easy installation with 2G Technology Licensed by Välinge.



Glue Free Installation- CROSSBOND Laminate flooring is not glued.



Impact Resistant- High Resistant to Impact Pressure mark from Furniture & Chair legs.



Wax Sealed Joints- Premium wax coated on Sealed Joints.



Durability- Super Strong and Dimensional Durability.



Moisture Resistant- Highest resistance against Swelling & Expansion.




Wear Resistant- Wear Resistant top layer reinforced by the high density HDF Core.



Aluminium Oxide Overlay- Aluminium Oxide coated top layer for High Abrasion.



Laminate Flooring Structure

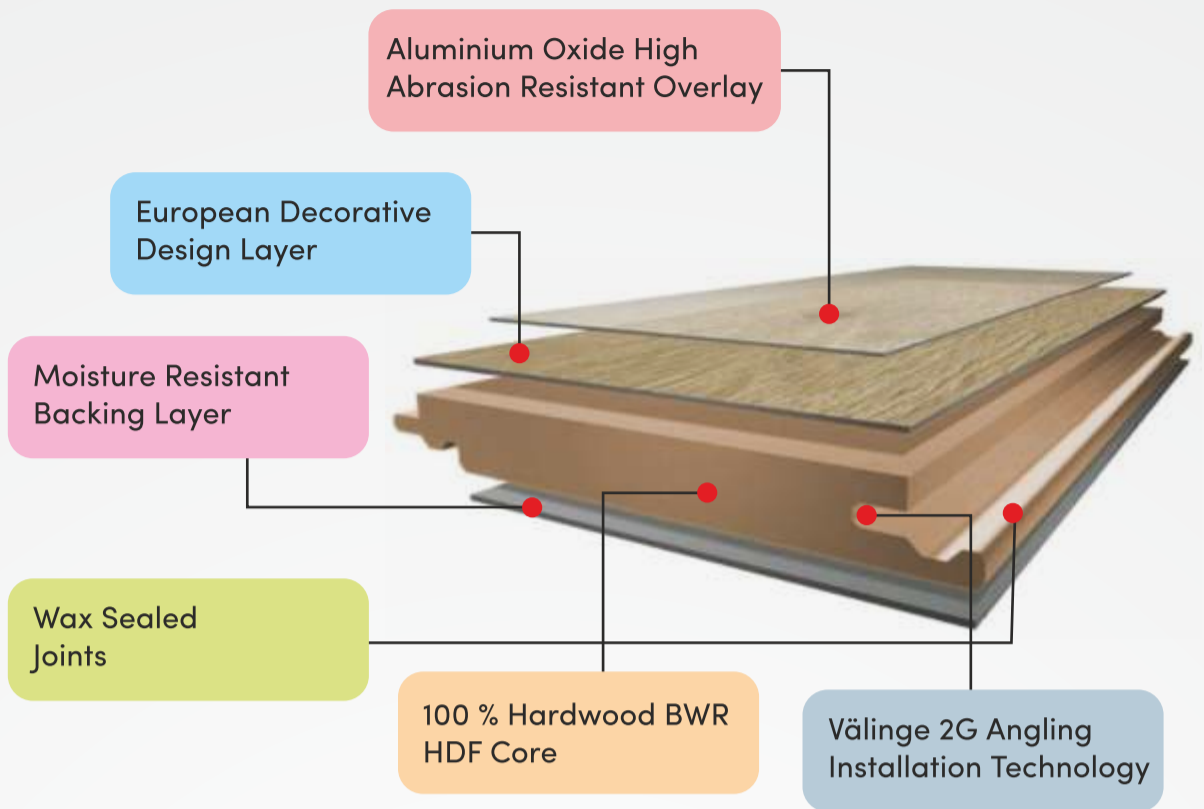

Strong and Robust Technology

2G is the brand name of the strong and robust angling installation system by Välinge.

Locking system for every needs

Floor installation should be a fast and simple process with perfect results every time. That means no gaps between the boards, no unevenness, and no squeaking sounds. Equally important, the floor should remain perfect for its lifetime of the floor. The Välinge range of locking systems provides an industry standard for installing floors. Since no floor is alike, these systems have been optimized for all flooring products, widths, and thicknesses.



ANGLING INSTALLATION

- Works with all materials
- For long and short side

Application Area



LIVING AREA



DRAWING ROOM



CORPORATE OFFICE



LIBRARY




SCHOOL & COLLEGE



HOTEL



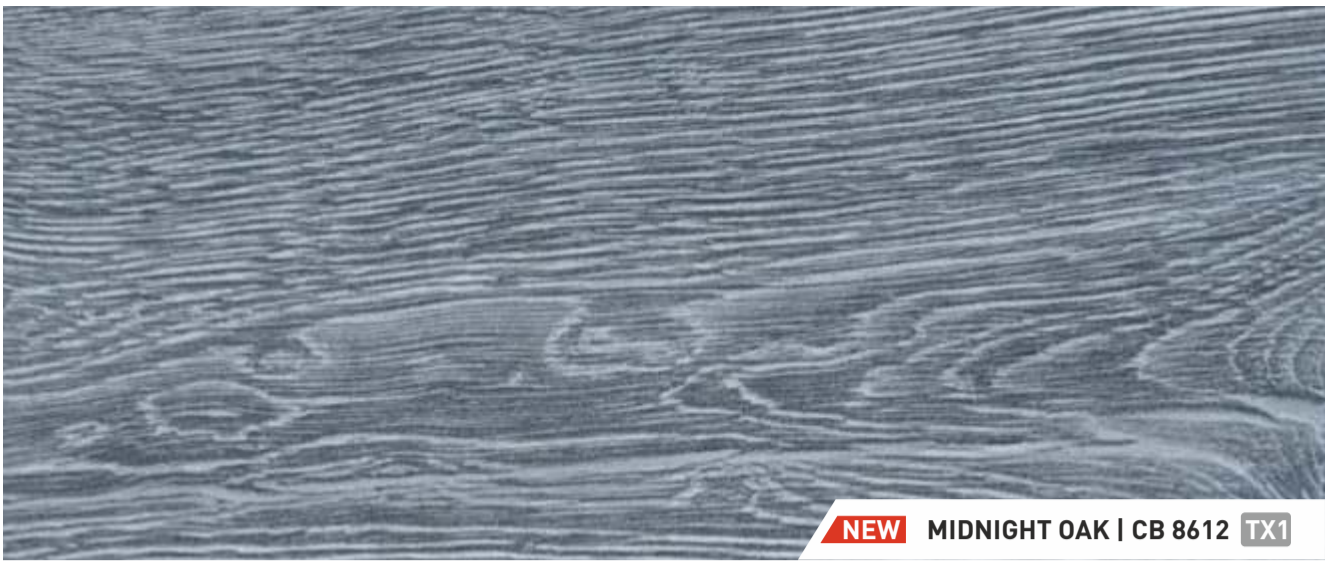

NEW MIDNIGHT OAK | CB 8612 TX1



NEW URBAN ASHWOOD | CB 8611 TX1



OLIVE ASH | CB 8601 TX1



OAK CHERRY | CB 8602 TX1



MEDOC WALNUT | CB 8603 TX1



MEDOC WALNUT | CB 8603 TX1




OVENKAKOL | CB 8604 TX1



LAUREL OAK DARK | CB 8174 TX1



BRAZILLIAN WALNUT | CB 8161 TX1

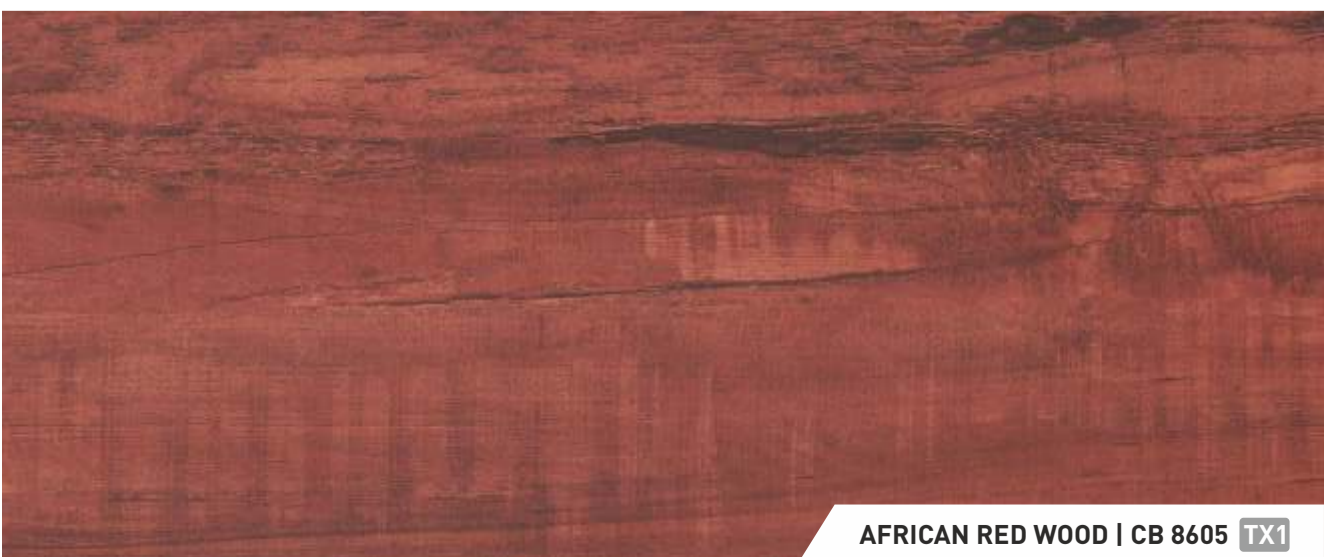

AFRICAN RED WOOD | CB 8605 TX1



VINE YARD OAK | CB 8606 TX1



CHERRY PINE | CB 8159 TX1



COLUMBIAN WALNUT | CB 8194 TX1



CASTEL OAK | CB 8125 TX1




NOCE LYON | CB 8205 TX1



CANYON WOOD DARK | CB 8144 TX1



HARMONY OAK | CB 8609 TX1

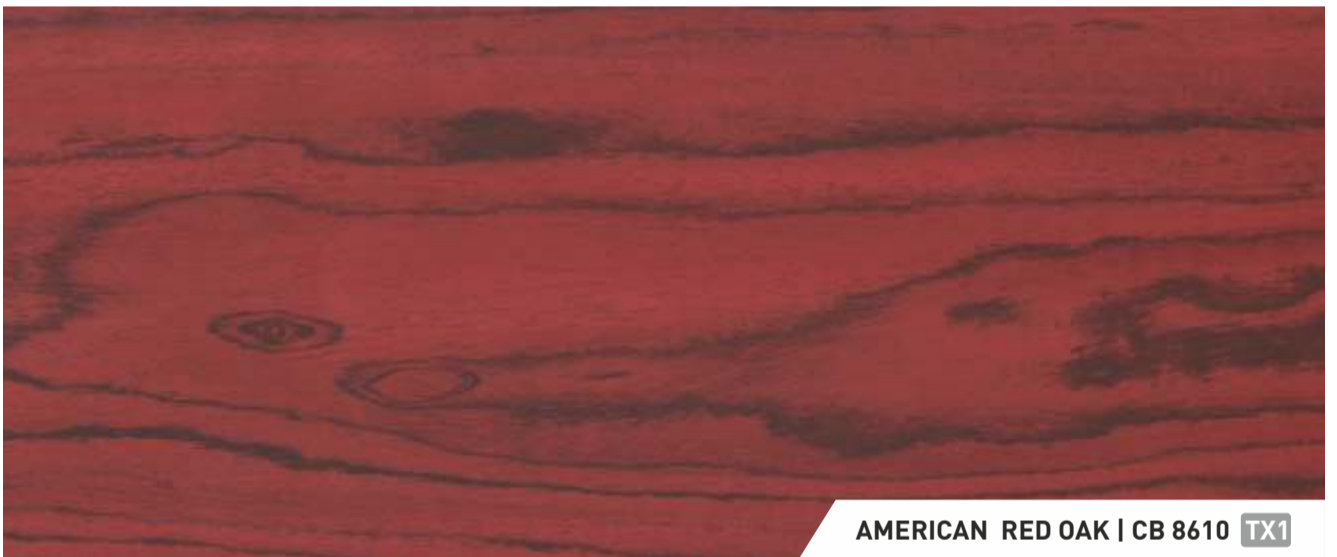

AMERICAN RED OAK | CB 8610 TX1



EBONY WALNUT | CB 8160 TX1



CANYON WOOD LIGHT | CB 8143 TX1



CHOCOLATE OAK | CB 8608 TX1



SIAM TEAK | CB 8607 TX1

CROSSBOND®



**HDF LAMINATE
FLOORING**



METRO DECORATIVE PVT. LTD.

Head Office : D-20/1, 2nd Floor,
Okhla Industrial Area, Phase-II, New Delhi-110020


Works : Village Oogli, Yamuna Nagar Road,
Kala Amb, Himachal Pradesh-173030

Call : +91-11-41740150

Email : info@crossbondindia.com

Web : www.crossbondindia.com

Follow us :



AN ISO 9001:2015, ISO 14001:2015, OHSAS 18001:2007 CERTIFIED COMPANY

Publication: December-2023